

LMG-S24E64

240 Dots X 64 Dots

1/64 Duty

1/9 Bias

FEATURE

LCD TYPE	STN , FSTN
LCM CONTROLLER IC	T6963C or Equivalent
LCM BACKLIGHT TYPE	LED , CCFL
POWER SUPPLY FOR LCM	DC +5V
LED BACKLIGHT INPUT	DC +5V
FL INVERTER	FL001-5A / FL001-12A
LCM DIMENSION	180.0 (W) X 65.0 (H) mm
LCM VIEWING	132.0 (W) X 39.0 (H) mm
ACTIVE DISPLAY AREA	127.16 (W) X 33.88 (H) mm
LCD DOT SIZE	0.49 (W) X 0.49 (H) mm
LCD DOT PITCH	0.53 (W) X 0.53 (H) mm

ABSOLUTE MAXIMUM RATINGS

ITEM	SYM.	MIN.	TYP.	MAX.	UNIT
OPERATING TEMP.	T _{OP}	-20	--	+70	°C
STORAGE TEMP.	T _{ST}	-30	--	+80	°C
INPUT VOLTAGE	V _I	V _{SS}		V _{DD}	V
SUPPLY VOL. FOR LOGIC	V _{DD} -V _{SS}	--	5.0	6.5	V
SUPPLY VOL. FOR LCD	V _{DD} -V _O	--	9.0	12.0	V


INTERFACE PIN CONNECTIONS (JP1)

NO.	SYM.	LEVEL	FUNCTION
1	FGND	--	Frame ground
2	V _{SS}	--	Ground potential (Logic)
3	V _{DD}	--	Power supply for Logic Circuit
4	V _O	--	Power supply for LCD Circuit
5	/WR	L	Data write
6	/RD	L	Data read
7	/CE	L	Chip enable
8	C/D	H/L	Command/Data
9	V _{EE}	--	Negative Voltage
10	/RST	L	Controller reset
11	DB0	H/L	Data Bit 0
12	DB1	H/L	Data Bit 1
13	DB2	H/L	Data Bit 2
14	DB3	H/L	Data Bit 3
15	DB4	H/L	Data Bit 4
16	DB5	H/L	Data Bit 5
17	DB6	H/L	Data Bit 6
18	DB7	H/L	Data Bit 7
19	FS	H/L	Font select : H:6x8 L:8x8
20	NC.	--	NO CONNECTION

ELECTRICAL

ITEM	SYM.	CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Voltage For Logic	V _{DD} -V _{SS}	Ta=25°C	4.5	5.0	5.5	V
Supply Voltage For LCD Driver	V _{LCD}	Ta=25°C	8.7	9.0	9.3	V
Input High Voltage	V _{IH}	--	2.2	--	V _{DD}	V
Input Low Voltage	V _{IL}	--	0	--	0.6	V
Supply Current For Logic	I _{DD}	V _{DD} =+5V	--	7.0	12.0	mA
LED Current	I _F	Ta=25°C	--	130/400	--	mA

BLOCK DIAGRAM

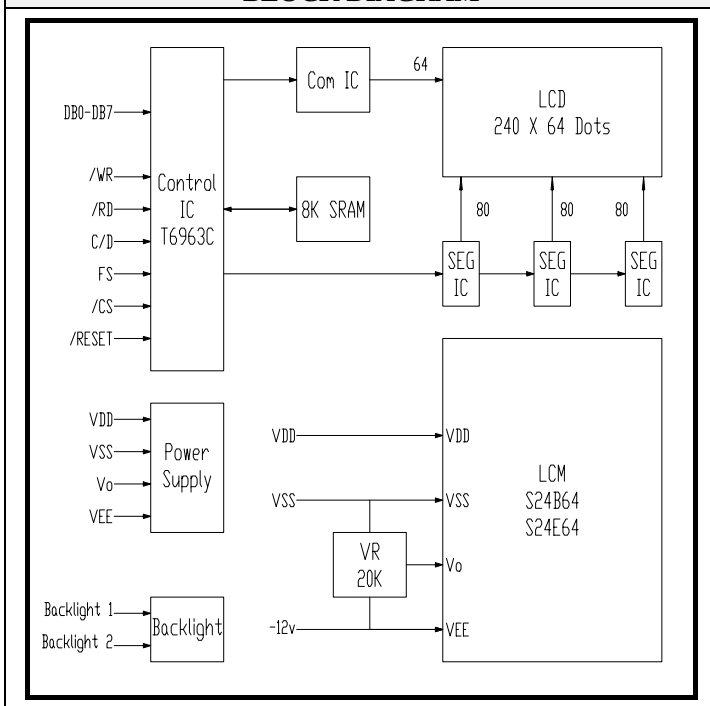

DIMENSIONAL DRAWING

