


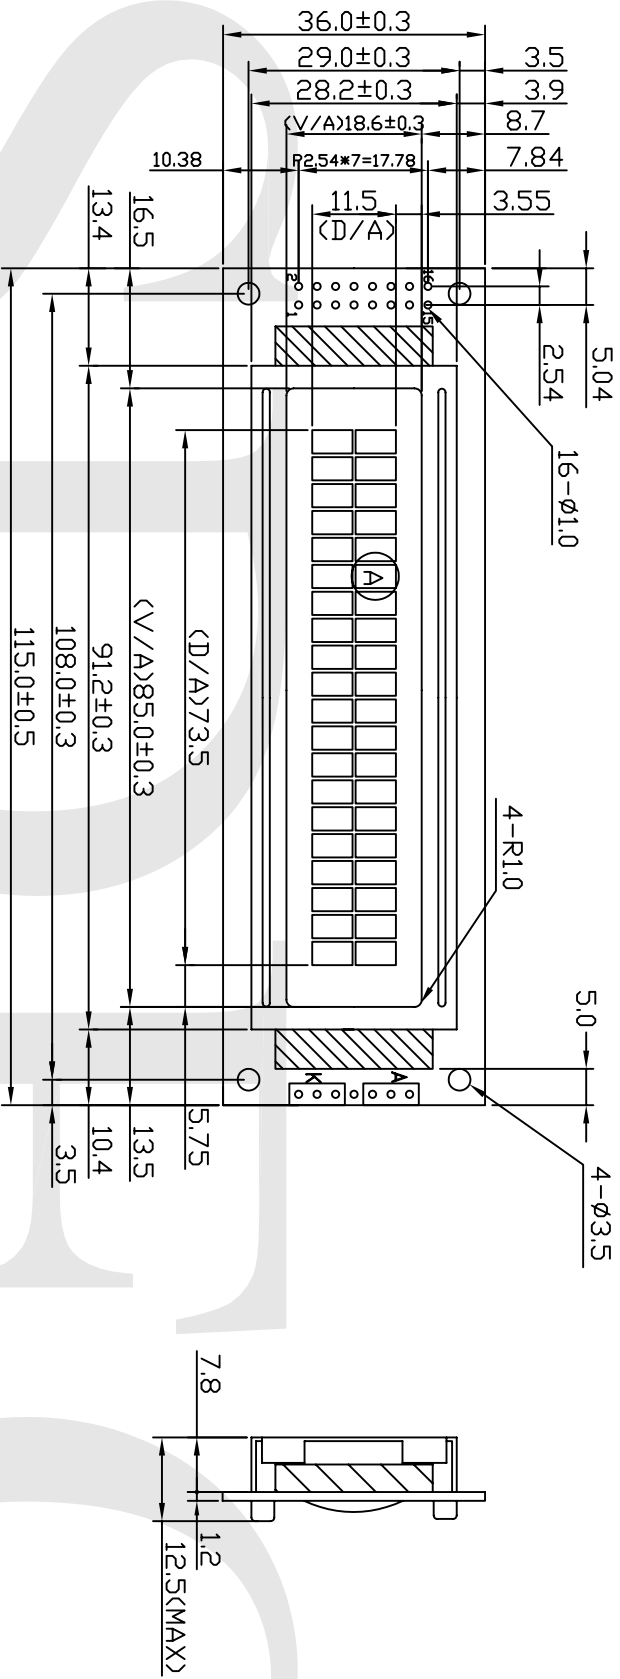


INTERFACE PIN CONNECTIONS:

No.	SYM	LEVEL	FUNCTION	No.	SYM	LEVEL	FUNCTION
1	VSS	-	0V	9	DB2	H/L	DATA BIT2
2	VDD	-	5V	10	DB3	H/L	DATA BIT3
3	Vo	-	CONTRAST ADJ	11	DB4	H/L	DATA BIT4
4	RS	H/L	REGISTER SELECT	12	DB5	H/L	DATA BIT5
5	R/W	H/L	READ/WRITE	13	DB6	H/L	DATA BIT6
6	E	H,H→L	ENABLE SIGNAL	14	DB7	H/L	DATA BIT7
7	DB0	H/L	DATA BIT0	15	A(+)	+5V	BACKLIGHT
8	DB1	H/L	DATA BIT1	16	K(-)	0V	BACKLIGHT

SCA02002F1JEW20

- Display Type : VATN , White-Black , 6H
- Display Mode : Transmissive; Negative
- Power Supply : +5.0V
- Operating Temperature : -20°C~70°C
- Storage Temperature : -30°C~80°C
- Drive Mode : 7.0V,1/8Duty,1/4Bias
- Backlight : White
- Control IC : SPLC780D1-03

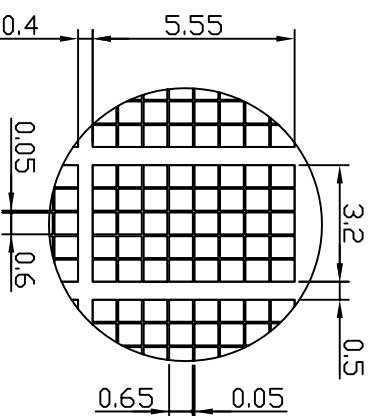

A B L D C K

5:1

SDEC SDEC TECHNOLOGY CORP				項次	變更內容	日期
品名	SCA02002F1JEW20	圖號		1		

Customer NO.	日期	2014.01.17	2			
製圖	陳詩楠	審核	±0.2單位	mm	4	
確認	比例	1:1	版本	A版	5	
審核	Page	1/1		6		